



Specifications

Model		FB483562XP
Nominal Capacity		850mAh
Nominal Voltage		3.7V
Weight(Approx.g)		22.0
AC-Impedance(mΩ) at 1KHz		Max 15.0
Dimensions	Thickness	4.8 ± 0.2mm
	Width	35 ± 0.5mm
	Length	62 ± 2.0mm
Nominal Charge Condition	Current	425mA(0.5C)
	Voltage	4.2V
	Cut-off Current	42.5mA(C/20)
	Ending Time	2.5h
Nominal Discharge	Current	850mA(1C)
	Cut-off Voltage	3.0V
Max.Charge Current		850mA(1C)
Max Discharge Current	Continuous	21.25A(25C)
	Burst	42.5A(50C)
Temperature Condition	Charge	0~45℃
	Discharge	-20~60℃
	Storage	-20~45℃


Dimensions(mm)

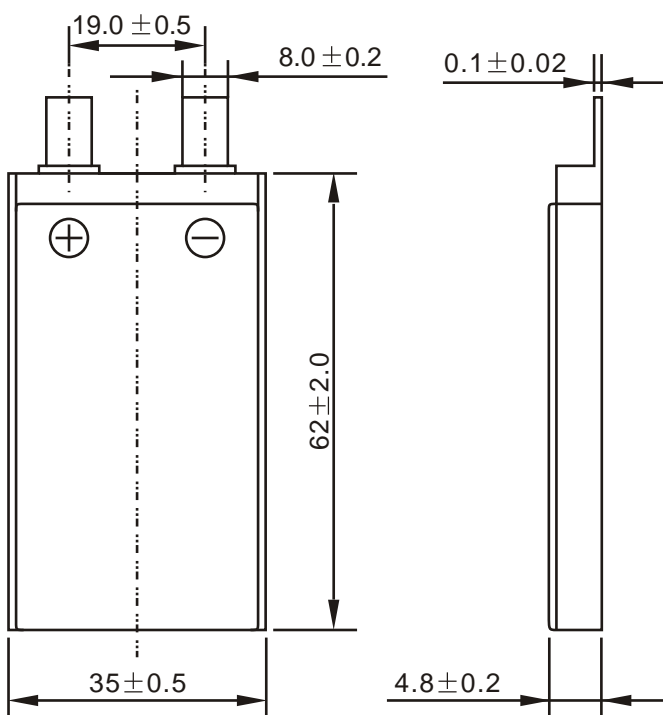


Charge Characteristics

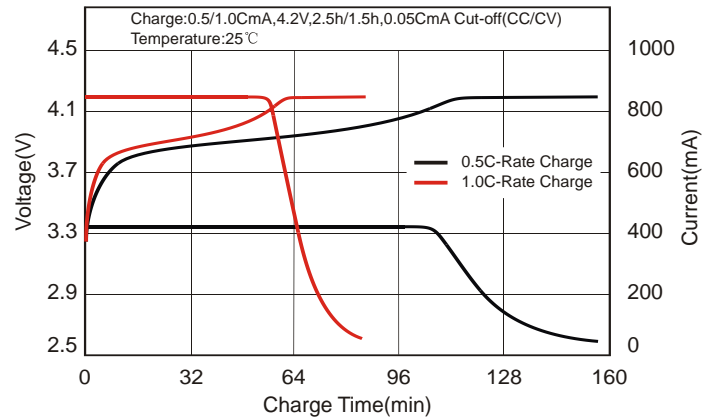

Discharge Rate Characteristics

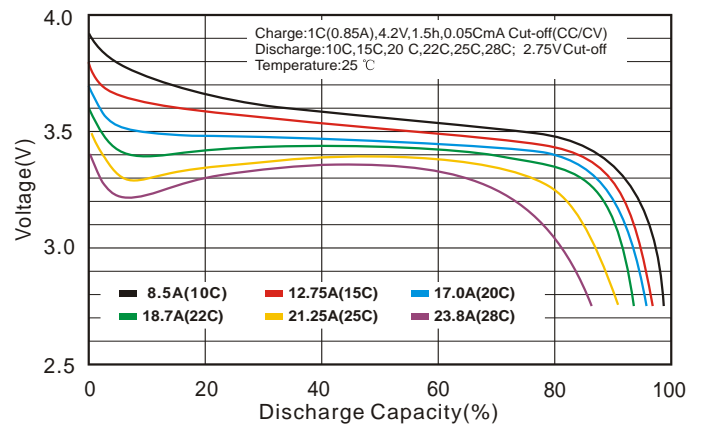

Discharge Temperature Characteristics

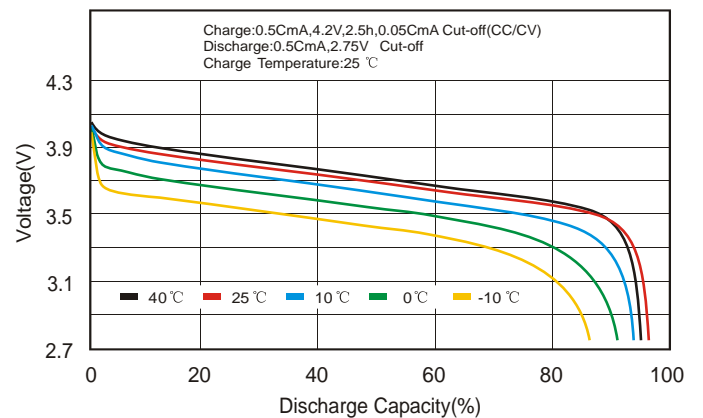

Cycle Life Characteristics

